


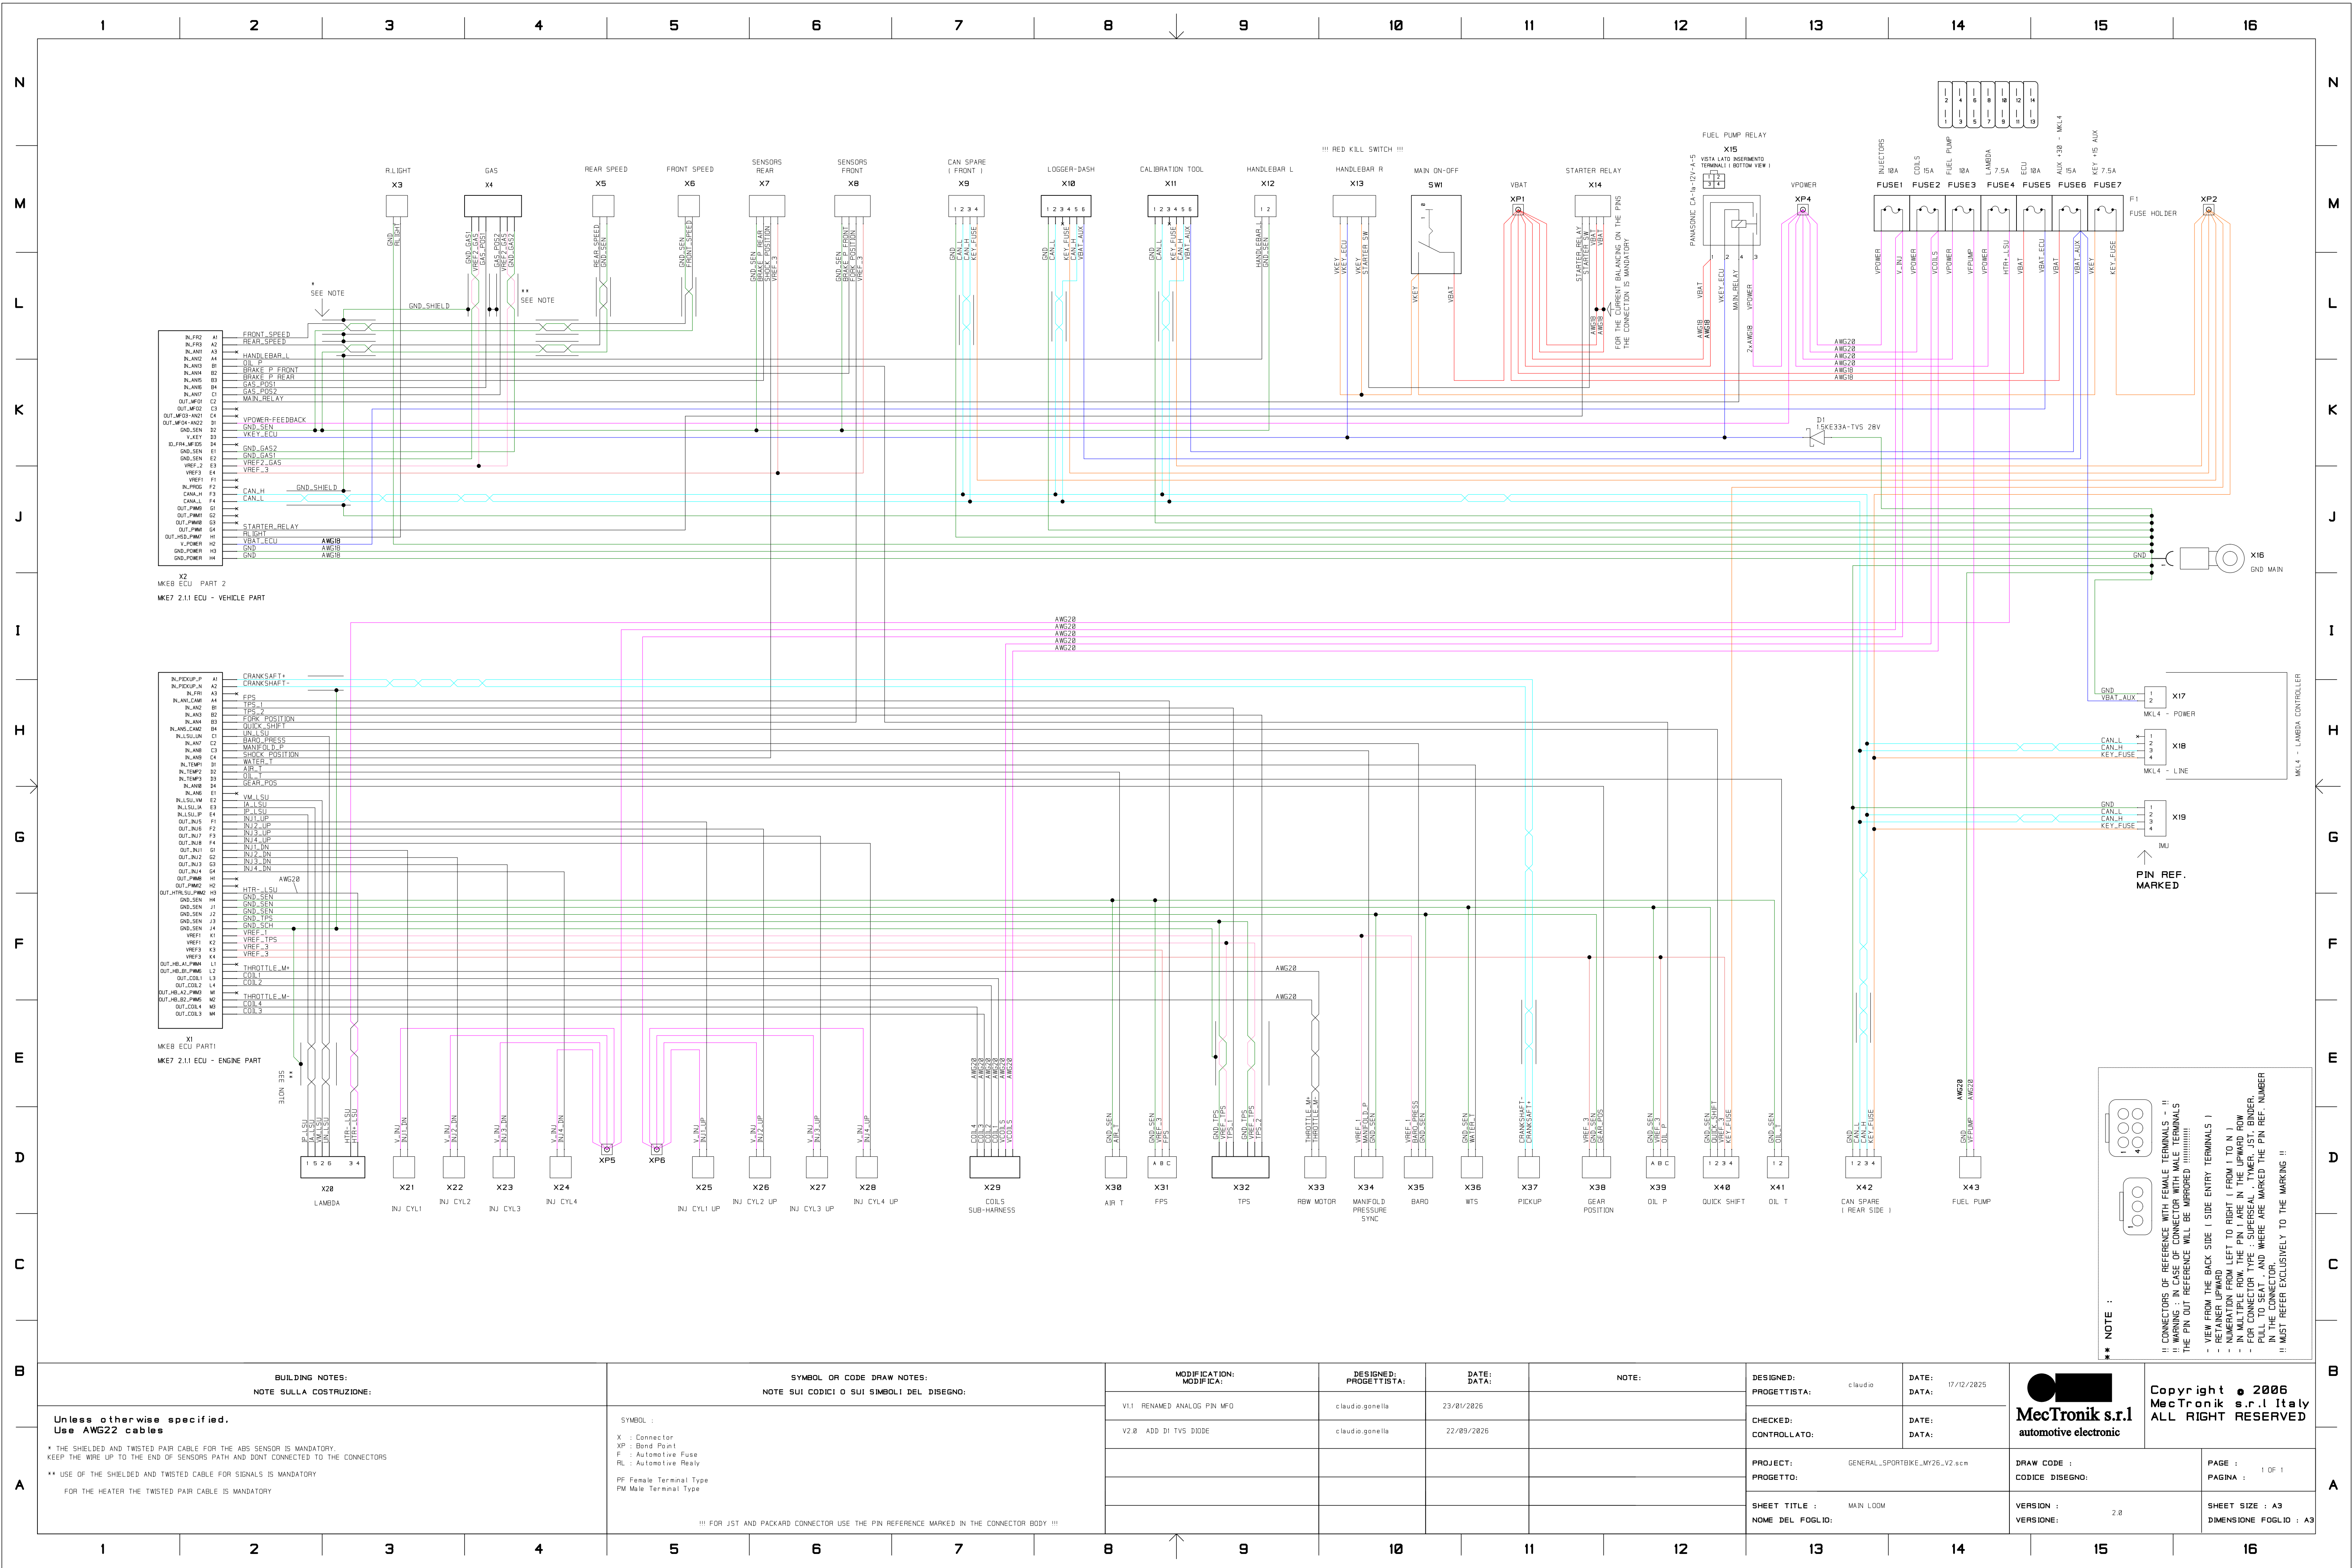

BUILDING NOTES: NOTE SULLA COSTRUZIONE:		SYMBOL OR CODE DRAW NOTES: NOTE SUI CODICI O SUI SIMBOLI DEL DISEGNO:		MODIFICATION: MODIFICA:	DESIGNED: PROGETTISTA:	DATE: DATA:	NOTE:	DESIGNED: PROGETTISTA:	DATE: DATA:	 Copyright © 2006 MecTronik s.r.l Italy ALL RIGHT RESERVED		
Unless otherwise specified. Use AWG22 cables * THE SHIELDED AND TWISTED PAIR CABLE FOR THE ABS SENSOR IS MANDATORY. KEEP THE WIRE UP TO THE END OF SENSORS PATH AND DON'T CONNECTED TO THE CONNECTORS ** USE OF THE SHIELDED AND TWISTED CABLE FOR SIGNALS IS MANDATORY FOR THE HEATER THE TWISTED PAIR CABLE IS MANDATORY		SYMBOL : X : Connector XP : Bond Point F : Automotive Fuse RL : Automotive Relay PF: Female Terminal Type PM: Male Terminal Type !!! FOR JST AND PACKARD CONNECTOR USE THE PIN REFERENCE MARKED IN THE CONNECTOR BODY !!!		V1.1 RENAMED ANALOG PIN MF0	claudio.gonnella	23/01/2026			DATE: DATA:		17/12/2025	
				V2.0 ADD DI TYS DIODE	claudio.gonnella	22/09/2026		CHECKED: CONTROLLATO:	DATE: DATA:			
								PROJECT: PROGETTO:	GENERAL_SPORTBKE_MY26_V26.scm		DRAW CODE : CODICE DISEGNO:	PAGE : PAGNA : 1 OF 1
								SHEET TITLE : NOME DEL FOGLIO:	MAIN LOOM		VERSION : VERSIONE:	A3 2.0